MiBOXER® | Mi·Light Subordinate New Brand

CCT Remote Control with Scroll Wheel

Model No.: C12

Product Feature




- 2.4GHz wireless transmitting technology , fast transmitting, stable signal and anti-interference
- Control multi devices at the same time
- Dim cct and brightness
- Support Miboxer/Milight 2.4G controller and light series
- Control Distance 30m
- Magnetic installation
- For commerical, hotel and home lighting


Product Parameter

Product Name::	CCT remote	Working temperature:	-10~40℃
Model No.::	C12	EMC standard(EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.3.2
Working voltage:	3V(AAA*2PCS)		
Standby consumption:	10μA	Security Standard（LVD）:	EN 61347-2-11：2001+A1: 2019 EN 61347-1: 2015+A1:2021 EN 62493:2015+A1:2022
Transmission:	6dBm		
Protocol:	2.4GHz RF	Radio equipment（RED）:	ETSI EN 300 400 V2.2.1
Modulation:	GFSK	Certification:	CE、EMC、LVD、RED
Control Distance:	30M		


Remote



Remote Holder



Function

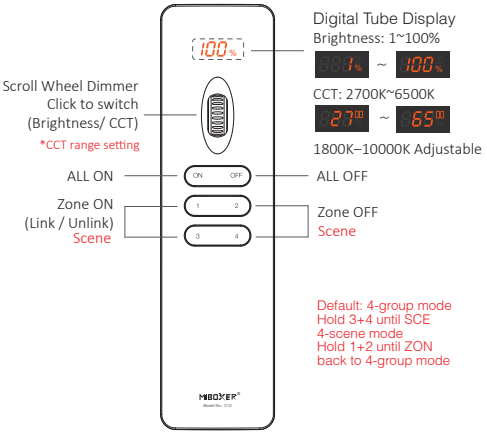

*Press and hold the scroll wheel to set the minimum CCT.
After setup, press the scroll wheel to set the maximum CCT.

Function

Dim Brightness

Brightness: 1~100%

1% ~ 100%

Up and down to change brightness

1 2

Hold 1+2 until ZON to 4-group mode

Dim CCT

Short press "Scroll Wheel" 1 time by CCT Adjustable

2700 ~ 6500

1800K–10000K Adjustable


Up and down to change color temperature

3 4

Hold 3+4 until SCE to 4-scene mode

Link/Unlink


Link controller must link with remote before using it



turn off light 10 seconds and turn on again




short press " 1 " 3 times within 3 seconds



link is done once light flashes 3 times slowlyyy

Link is failed if light doesn't flash, please repeat above steps
(Attention: can not link again if remote already finished linking)


Unlink



turn off light 10 seconds and turn on again




short press " 1 " 5 times within 3 seconds




link is done once light flashes 10 times quickly

Unlink is faild if light doesn't flash, please repeat above steps
(Attention: no need to unlink if the light never be linked)

Installation



Remove the sticker on the holder



Stick the holder on the wall and put remote on the holder

Attention:

1. To control MiBoxer/Mi-Light 2.4G series products，Please refer to the product manual for compatibility.
2. Don’t use it in humidity or high temperature area, please take out battery if don’t use it frequently and keep it in dry or static electricity area
3. Don’t use it near metal or strong magnetic area, it will affect signal and lost distance.

Made in China